

FT1000e Flight Type Dish Machine

Wash smarter, with peak performance and the lowest total cost of ownership






FT1000e LOW ENERGY FLIGHT TYPE

Realize Peak Performance and the Lowest Total Cost of Ownership for Food Service Operations

Designed for high volume operations, the New Hobart FT1000e Flight Type Dishwasher considerably reduces energy use and amp load requirements. This results in the lowest Total Cost of Ownership in the industry, saving operators thousands of dollars in energy costs annually for greater lifetime value.



HOBART MAKES IT EASY

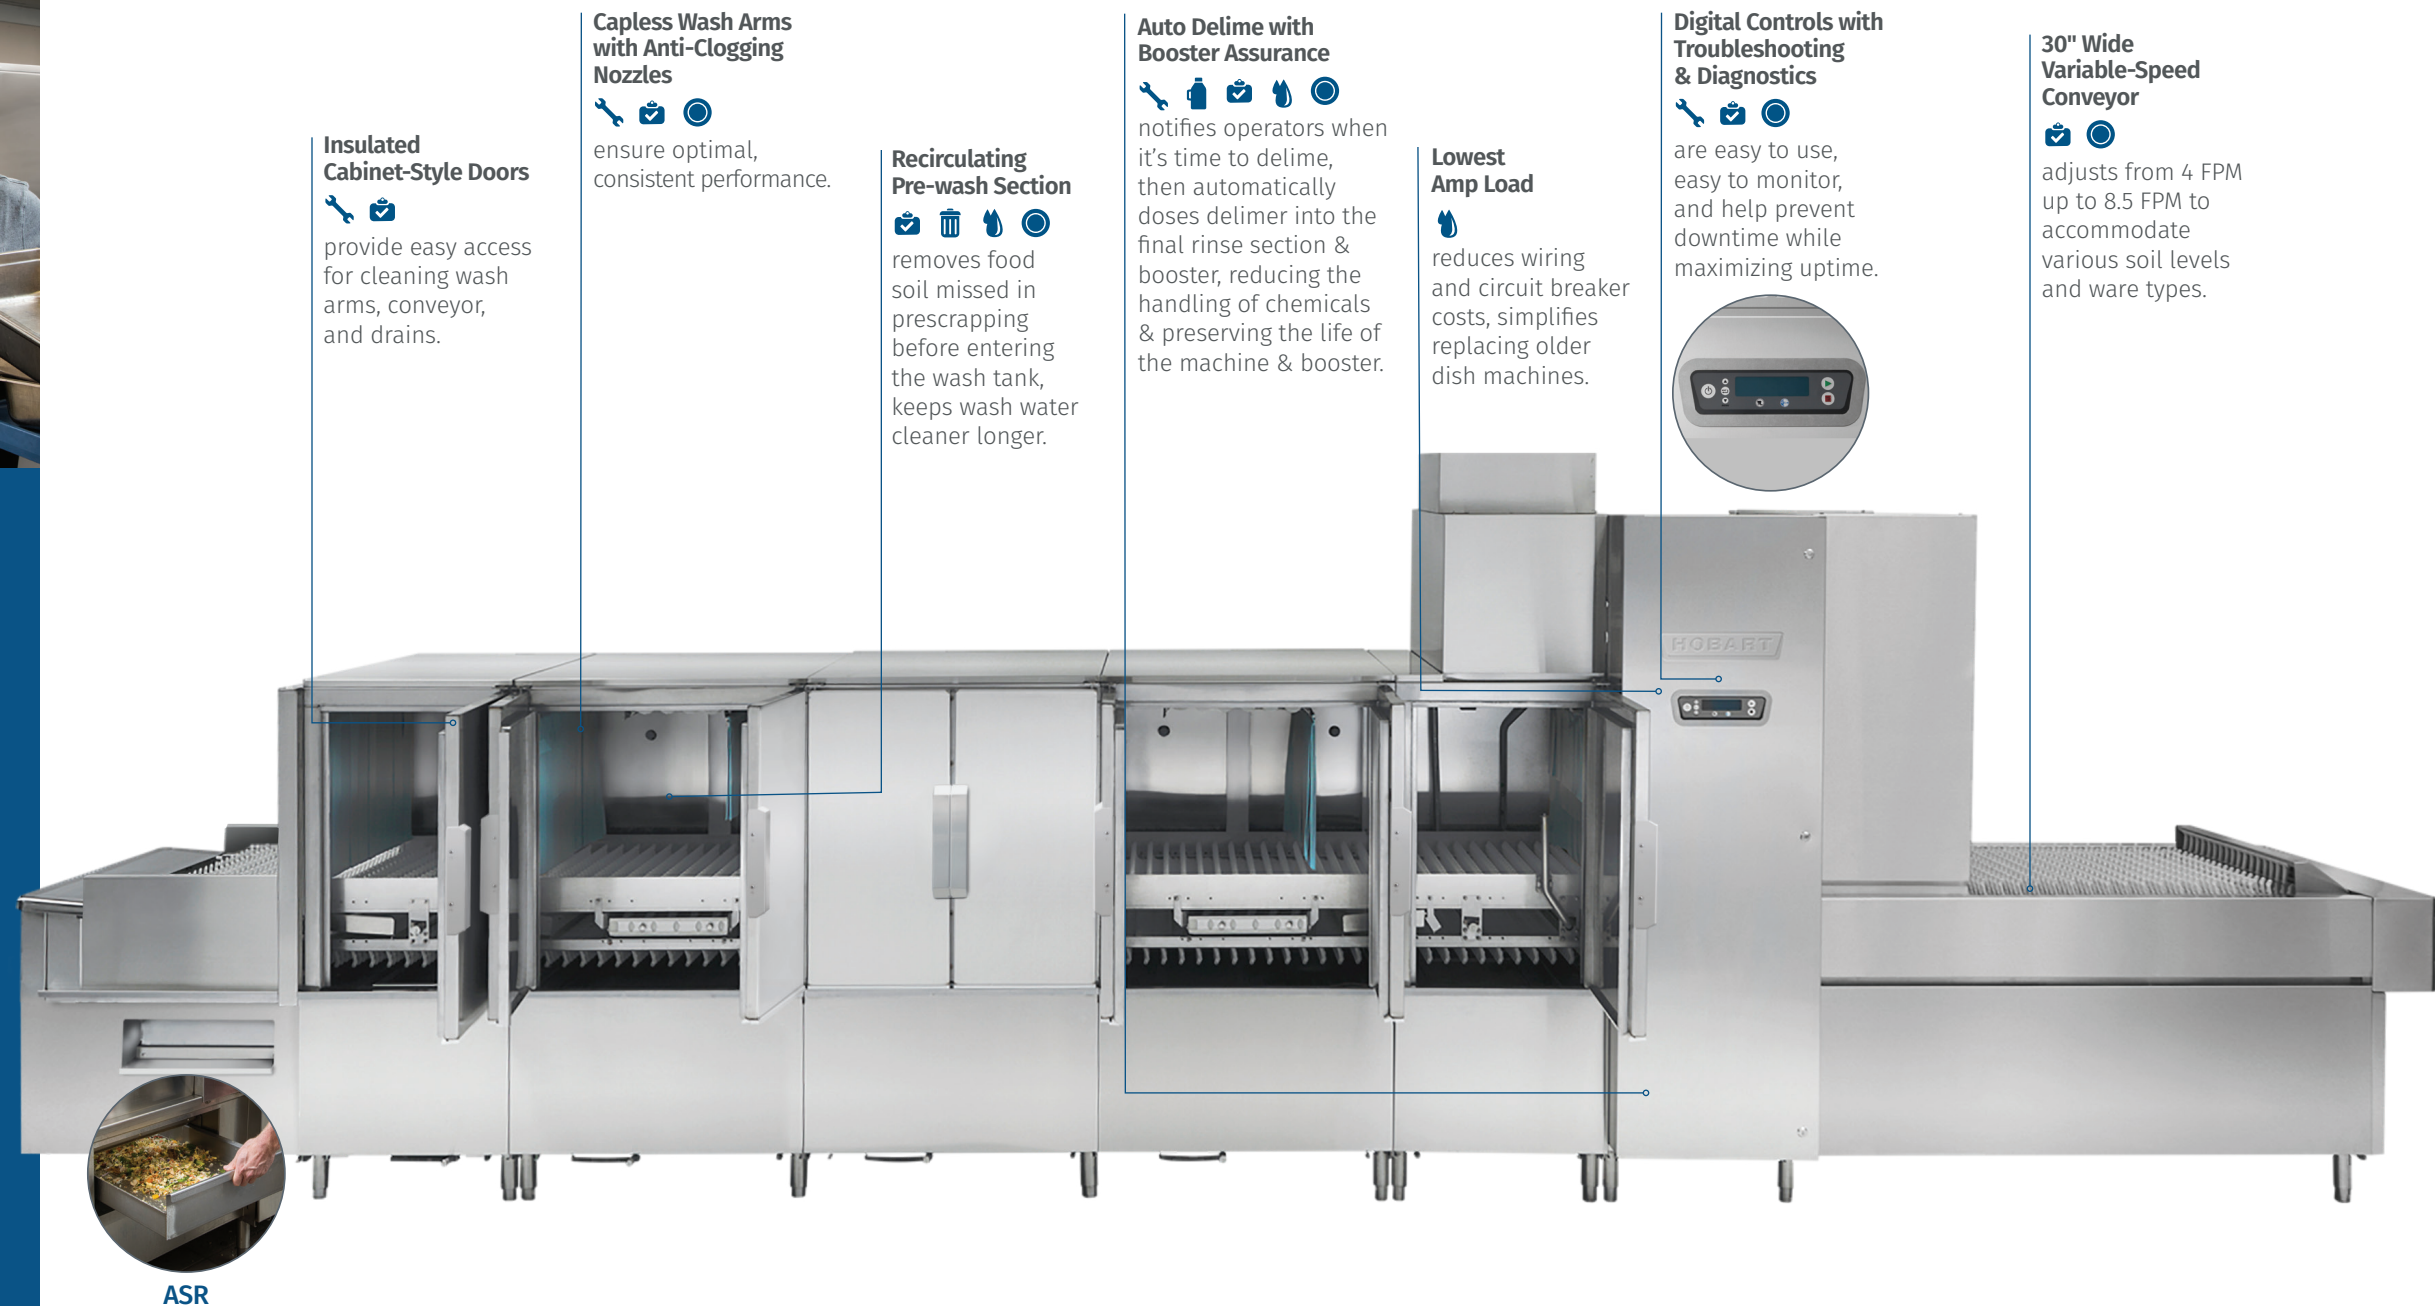-  Responsive Service Team in all 50 States
-  Customized Service Programs
-  Free Factory Startup
-  18 Month & Extended Warranty






ASR





Insulated Cabinet-Style Doors

  provide easy access for cleaning wash arms, conveyor, and drains.





Capless Wash Arms with Anti-Clogging Nozzles

   ensure optimal, consistent performance.


Recirculating Pre-wash Section

    removes food soil missed in prescrapping before entering the wash tank, keeps wash water cleaner longer.




Auto Delime with Booster Assurance

    notifies operators when it's time to delime, then automatically doses delimer into the final rinse section & booster, reducing the handling of chemicals & preserving the life of the machine & booster.

Lowest Amp Load



 reduces wiring and circuit breaker costs, simplifies replacing older dish machines.

Digital Controls with Troubleshooting & Diagnostics

   are easy to use, easy to monitor, and help prevent downtime while maximizing uptime.



30" Wide Variable-Speed Conveyor

  adjusts from 4 FPM up to 8.5 FPM to accommodate various soil levels and ware types.

HOBART PERFORMANCE BENEFITS

-  Cleaning Performance
-  Utilities
-  Chemical Optimization
-  Soil Management
-  Labor Management
-  Life Cycle Management

LOWEST POWER CONSUMPTION


Hobart's design advancements lower energy costs up to \$6,700 with the lowest amp load.

<p>REDUCE INSTALLATION COSTS</p> <p>\$3,000</p> <p>LOWEST AMP LOAD</p>	<p>15%+</p> <p>REDUCTION IN POWER CONSUMPTION</p>
<p>\$6,700*</p> <p>COST SAVINGS</p> <p>VERSUS COMPETITIVE MODELS</p>	<p>CALL FOR A</p> <p>FREE</p> <p>TCO AUDIT</p>

*Projected annual energy cost savings from FT1000e Advansys vs. competitive machines running 10 hrs./day, 365 days.




SAVE YOUR OPERATION TIME & MONEY




CUT ENERGY CONSUMPTION UP TO 20%

Energy Recovery System reduces energy use by capturing escaping heat and steam from the exhaust air.



REDUCE WASH WATER CHANGES UP TO 50%

Automatic Soil Removal (ASR) removes up to 80% of food soil before it reaches the pre-wash tank.



SAVE UP TO \$1,405 ON OPERATING COSTS

Ventless Energy Recovery™ results in lower energy use and eliminates the need for a vent hood.

GET THE RIGHT SOLUTION FOR YOUR DISHROOM

STANDARD FEATURES	advansys	EGR	BASE
Rinse Rate (Gallons/Hour)	58	58	58
Dishes Per Hour	10,610-14,310		
Blower Dryer	●	Optional	
Auto Delime with Booster Assurance	●	●	
Automatic Soil Removal (ASR)	●	●	
Energy Recovery	●	●	
Ventless	●		
Cost of Ownership Savings	\$4,923*	\$4,710*	\$3,110*

OPTIONS AND ACCESSORIES

- ASR (Auto Soil Removal Tank)
- EGR (Energy Recovery)
- Ventless Exhaust
- 6" higher than standard chamber
- Multiple conveyor choices
- Circuit breakers and single point connection
- Security and Casino packages
- Flanged feet
- Insulated split, vertical slide-up doors
- Water hammer arrestor/PRV
- Drain water tempering kit


Free Startup from Hobart Service included with all FT1000e models.

* Projected annual savings from comparison of FT1000e vs. previous FT1000 model type running 10 hours a day, 365 days with electric heat.



FT1000e WASHER STANDARD CONFIGURATION

Configuration shown includes Pre-Wash, Power Wash, Power Rinse, Dual Rinse and ASR, with Energy Recovery (EGR) and Blower Dryer

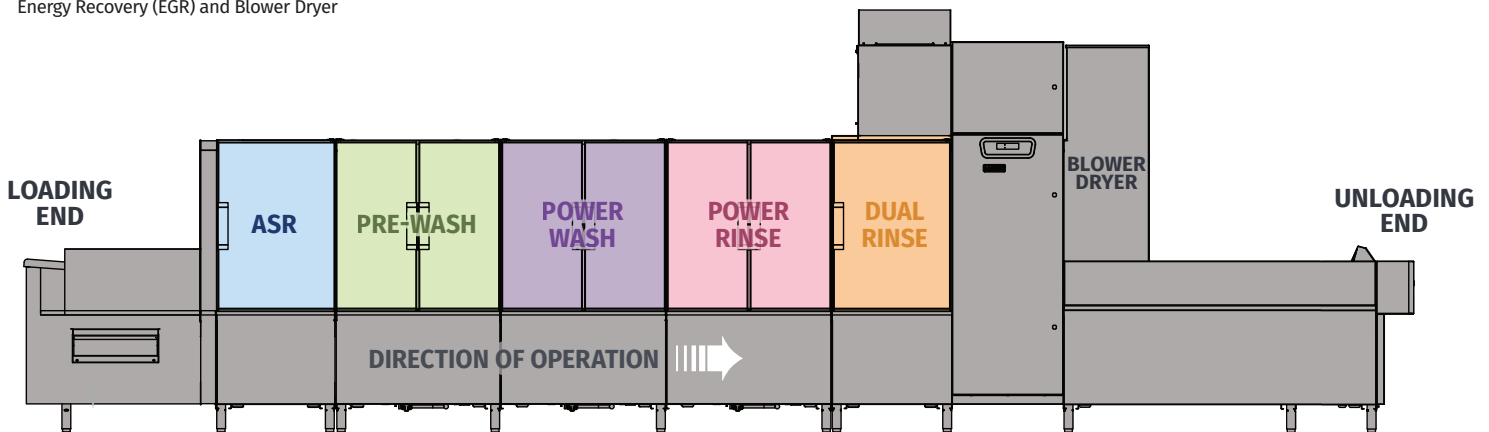

Load Length **5'7" to 9'8"

** Min/max lengths may vary by model.
Power Rinse section comes standard on full-length models (not available on short models).

Unload Length **5'7" to 16'9"

CONVEYOR CHOICE IS CRITICAL

General Ware (plates and bowls),
Prep Ware, Occasional Pans
Consider Standard conveyor

Insulated Ware,
Plates & Trays, Prep Ware
Consider Type A conveyor

Correctional Meal Trays
Consider Tivoli conveyor

Totes, bins, or other non-dishware
Please call to discuss your best options.



Let's Talk

We're ready to help you optimize your dishroom operations.
Call 888 4HOBART and talk to one of our experts today.



www.hobartcorp.com/FT1000e



www.hobartcorp.com

Hobart
701 S. Ridge Ave.
Troy, Ohio 45373
1-937-332-3000

ITW FOOD EQUIPMENT GROUP
F40824 (01/24) ©2024 Hobart