



DAILY OPERATION

1 Ensure strainer screen, scrap basket, and rack track are in position in the dishwasher tank. **A**

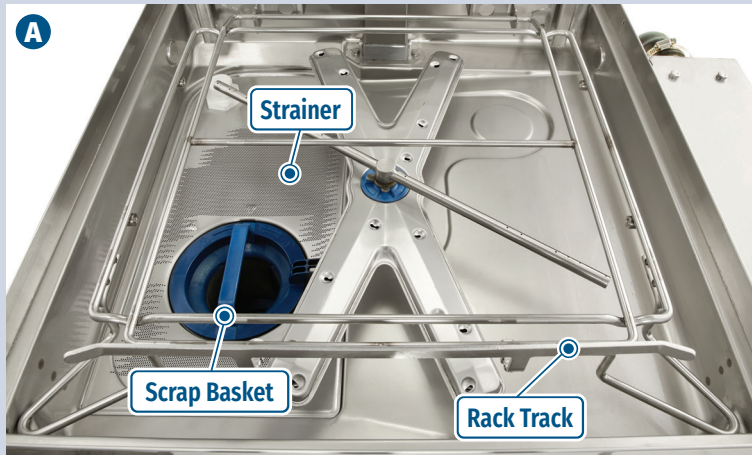

2 Close the door and push the **POWER** button. The word **FILL** will be displayed. **B**

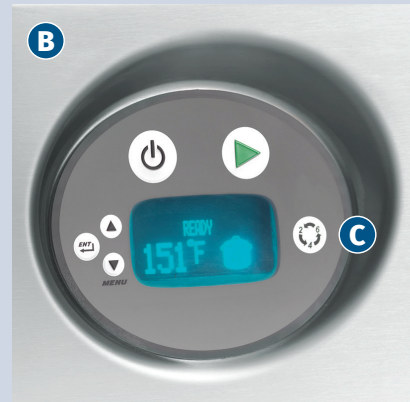

3 When fill is complete, the readout will display ready and the wash water temperature.

4 Press the **CYCLE** button **C** to select the wash cycle: 1 for normal serving ware; 2, 4 or 6 for heavier soiled items.


5 Open the door and slide the rack into the machine. Close the door.

6 Throughout the wash portion of the cycle, the wash water temperature is displayed, along with the word **WASH** and a symbol. During the rinse portion, the rinse water temperature will be displayed, along with the word **RINSE** and a symbol.

7 When the rinse cycle is complete, the rinse symbol disappears. Remove the rack of clean dishes.



DAILY CLEANING

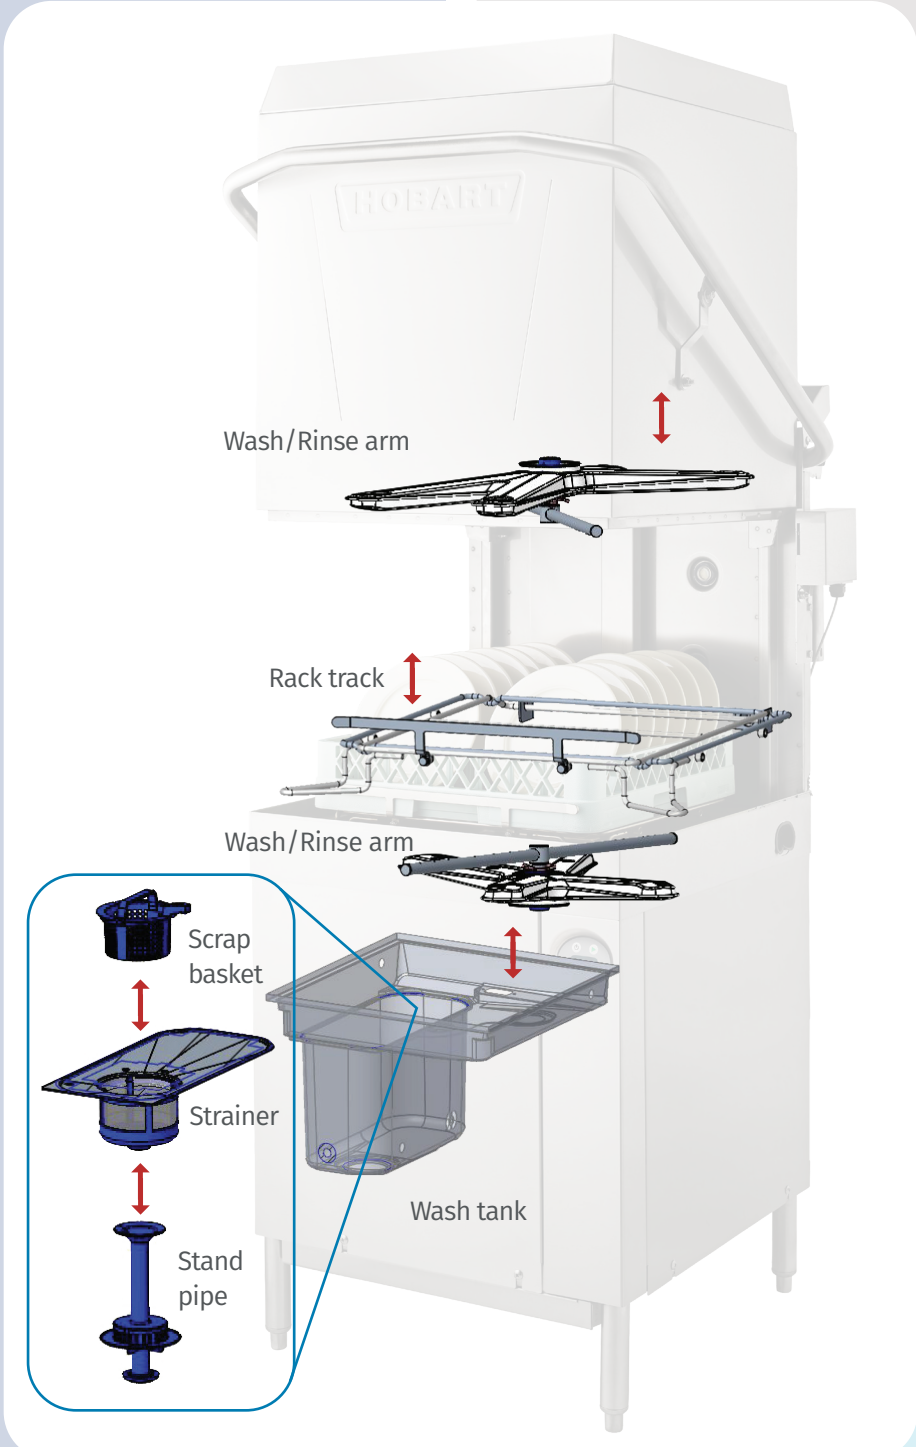

- 1 Push the **POWER** button. **B**
- 2 The machine will drain automatically and the display will power off.
- 3 Open the machine door.
- 4 Remove rack track, strainer and scrap basket; and stand pipe. Wash and rinse thoroughly. **A**
- 5 Thoroughly cleanse and flush the dishwasher interior. Remove any remaining food soil.
- 6 Make sure wash and rinse arms rotate freely and are clear of any obstructions. If not, remove arms and clean out obstructions.
- 7 Re-assemble the machine:
 - a. Replace stand pipe, strainer and scrap basket.
 - b. Install wash and rinse arms (if removed).
 - c. Replace rack track.
- 8 Wipe down machine exterior with a clean, wet dishcloth. **DO NOT USE STEEL WOOL, A SCOURING PAD OR ABRASIVE MATERIAL TO CLEAN THE MACHINE. DO NOT SPRAY THE EXTERIOR WITH A HOSE.**

NOTE: For end of day cleaning, complete steps 1 through 8 and leave the door open to allow the interior to air out and dry.

FOR CHEMICAL SANITIZING MACHINES

- 1 Place a serving bowl or mixing bowl upside down on a rack and run it through a cycle.
- 2 After cycle, dip a sanitizer test strip into the water collected on the surface of the bowl.
- 3 Compare the test strip to the test scale provided with your testing kit **D**. If the sanitizer level is out of limits (i.e. below 50 ppm or above 100 ppm), adjust the dosing. Refer to the AM16SCB manual for adjustment instructions, or contact your chemical provider.



OPERATIONAL TIPS

Use only commercial detergents and sanitizers with the AM16X.
NOTE: For machines with Hobart chemical pumps, when the machine is out of chemical sanitizer, **ADD SANITIZER** and a **WRENCH ICON** will display in the machine control screen, an alarm will sound and the machine will automatically pause operation. To continue operation, replace the chemical.