





FT1000e Configuration Guide – US & Canada

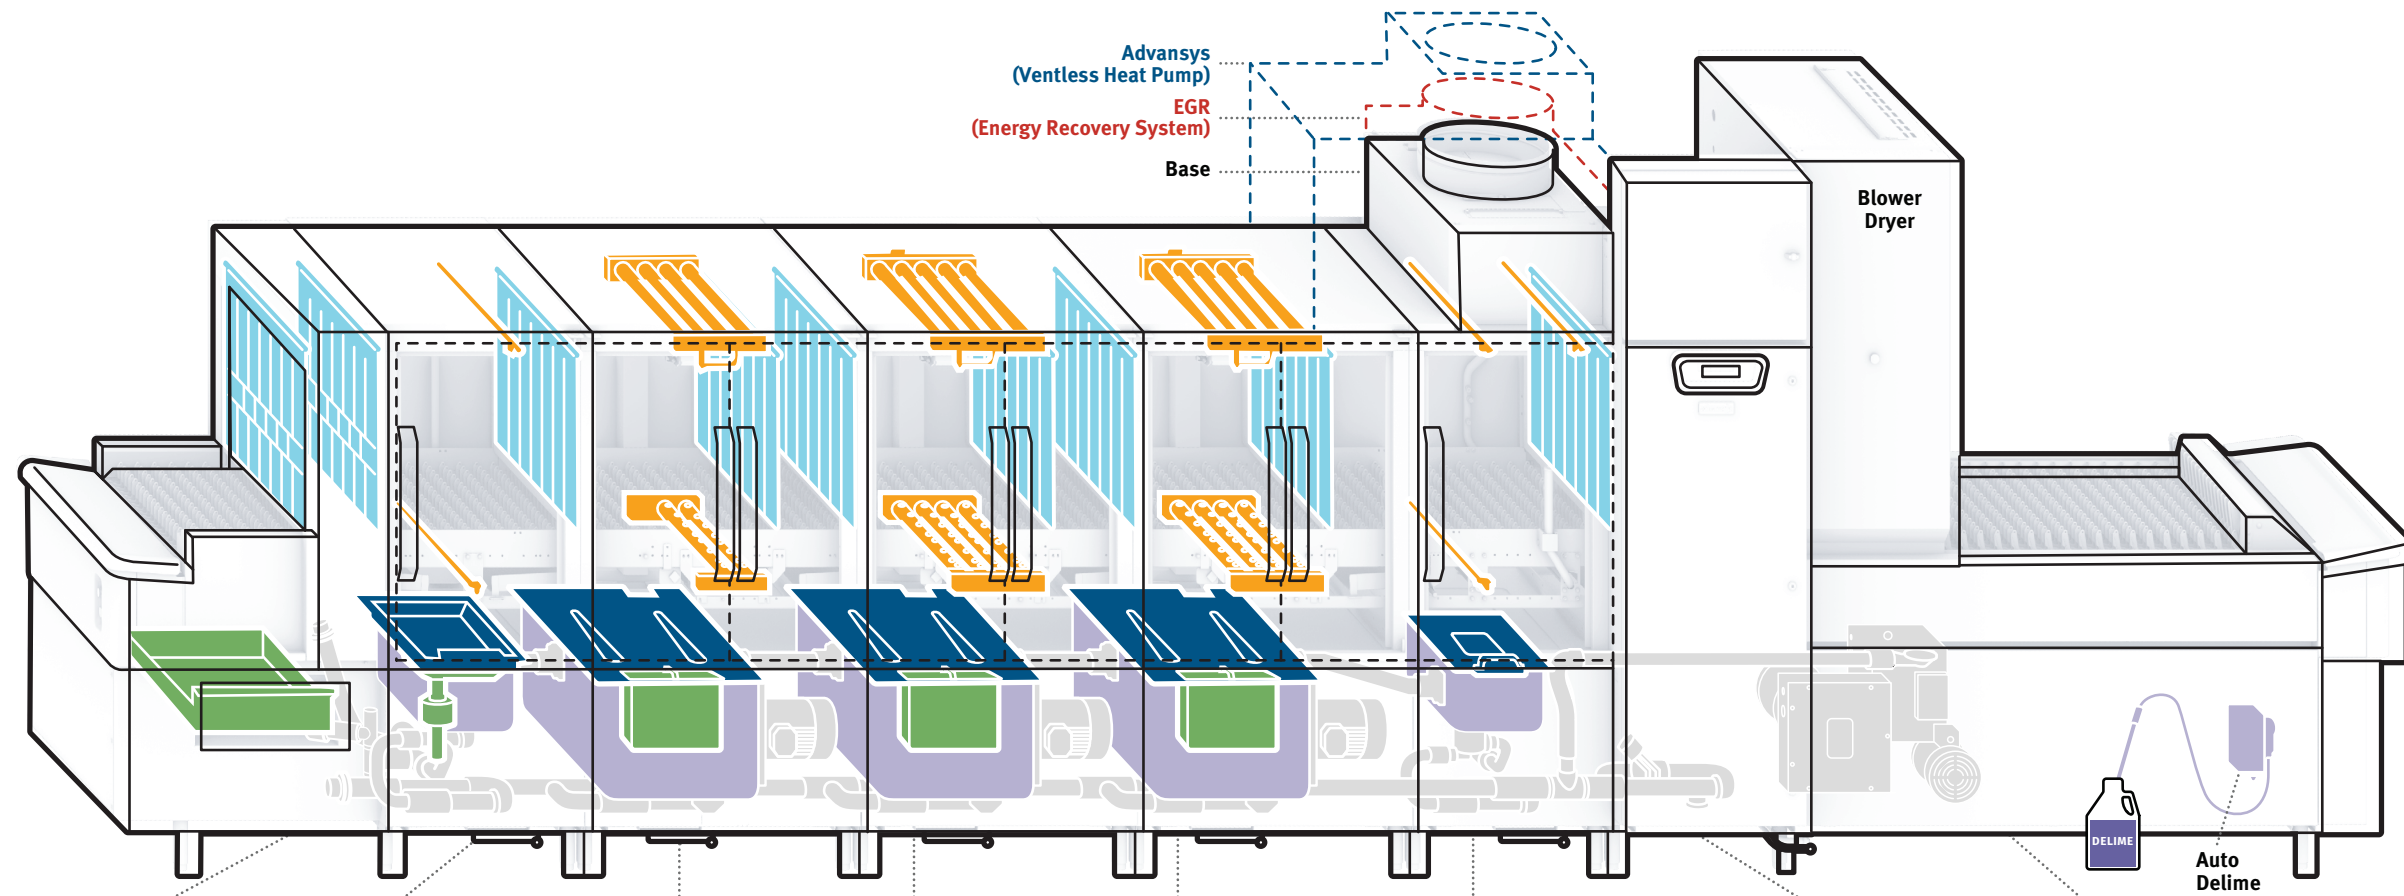

	Load Platform	ASR	PRE-WASH	WASH	POWER RINSE	DUAL/FINAL RINSE	CONTROL BOX	UNLOAD	ALL
APPROX LENGTH	Length Per Load Picked Below 2.5' (Non or Split if ASR) 13" Open/Usable 3.5' (Non or Split if ASR) 24.7" Open/Usable 4.5' (Non or Split if ASR) 36.5" Open/Usable 6' (Non or Split if ASR) 56" Open/Usable 8' (Non or Split if ASR) 80" Open/Usable	2'	3'	3'	3'	2'	Part of Unload Measurement	Length Per Load Picked Below 5.5' Non-Split W/O Blower Dryer 34" Open/Usable *BAS EGR Only 7.5' Non-Split W/O Blower Dryer 58" Open/Usable *BAS EGR Only 7.5' Non-Split With Blower Dryer 38" Open/Usable 9.0' Non-Split W/O Blower Dryer 77" Open/Usable, Non or Split *BAS EGR Only 9.0' Non-Split With Blower Dryer 58" Open/Usable, Non or Split 11.0' Non-Split W/O Blower Dryer 101" Open/Usable, Non or Split *BAS EGR Only 11.0' Non-Split W/O Blower Dryer 81" Open/Usable, Non or Split *Blower dryer standard on Advansys	L-R, R-L Elec or Steam Heat Insulated Hinged Doors, Option Vertical Doors Available (Long Leadtime) Security Packages Acc: Dwt, Water Hammer, Flanged Feet
COMMON FEATURES					Not Available on FT1000Se	Mandatory	Circuit Breakers Option on All BAS EGR & ADV Electric Options: 480/60/3 208/60/3 240/60/3 600/30/3 (CAN) BAS EGR & ADV Steam Options: 480/60/3 208-240/60/3 600/30/3 (CAN)		
BASE	Conveyors Standard With or W/O Cross Rods	Add as SEF	Drain in Load or Unload	Split Center (Not Shorty)	Standard on FT1000e	15kw Electric Booster or 120 Steam Booster Standard SEF Auto Clean SEF Auto Delime			Std Ht or 6" HTS Water Softener Optional
EGR	Type A With or W/O Cross Rods Position 1 W/O Cross Rods Position 2 W/O Cross Rods	ASR Standard (No \$ Savings to Remove) If No ASR & With Auto Clean & Auto Delime, Must Be Drain to Unload	Drain in Load or Unload if with ASR	Split Center (Not Shorty)	Standard on FT1000e	Energy Recovery 15kw Electric Booster or 120 Steam Booster Standard Auto Clean & Auto Delime Standard Auto Clean & Auto Delime Can Be Removed If No ASR (No \$ Savings to Remove)			Std Ht or 6" HTS Water Softener Optional
advansys	Tivoli, with Cross Rods Other Options Available as SEF	Required		Split Center (Not Shorty)	Standard on FT1000e	Adv Energy Recovery 10.7kw Electric Booster (Even on Steam) Standard Auto Clean & Auto Delime Mandatory			Std Ht Only Water Softener Mandatory
SHIPPING	Shipped Loose: Overflow Pipe, Drain Pipe, Curtains, Curtain Rods, Saddles, Saddle Backers, Flowback Pans, Chemical Bracket, Misc Kit Box. If Applicable: Blowers for Blower Dryer, Steam Trap, Drain to Load Kit, Auto Clean Hoses, Refrigerant Tube (ADV).								