## PROCESSING





Model C32



### **FEATURES**

Berkel Model C32 continuous feed food processor is a highperformance machine that quickly and conveniently, slices, dices, shreds, grates, and juliennes vegetables, fruits and cheese. The C32 should not be used to dice or cube cheese or meat. Constructed of heavy-duty aluminum with integrated handles, the compact C32 is easy to move from one location to another. The continuous feed attachment includes an automatic start/stop function, feed tube and design that allows the operator to load product with both hands for the fastest possible processing. The dual interlock boosts operator protection. The C32 has a variety of cutting plates to optimize the versatility and productivity of this superior machine.

#### C32 Continuous Feed Food Processor

#### **STANDARD FEATURES**

C32 CONTINUOUS FEED FOOD PROCESSOR

- Slices, dices, shreds, grates and juliennes fruit, vegetables, dry bread, cheese, nuts, etc.
- The C32 should not be used to dice or cube cheese or meat.
- Prepares up to 4.4 lbs (2 kg) per minute.
- 2-speed, 1½ HP, thermal motor protection with automatic reset.
- Furnished in 120/60/1 (UL Listed).
- Optimal speed settings and perfect cutting results for the required applications.
- Includes feed head and ejector plate.
- Only Model C32/2 is furnished with a <sup>5</sup>/<sub>32</sub>" (4 mm) shredder plate and <sup>5</sup>/<sub>32</sub>" (4 mm) slicing plate.
- Aluminum machine base and polycarbonate feed assembly for increased durability.

#### **OPTIONS**

Model C32 is not furnished with cutting plates. Cutting plates with this model must be ordered separately. Unit without slicing and shredding plates.

#### ACCESSORIES (Packaged & Sold Separately)

- □ Slicing Plates 1/32" (1 mm), 1/16" (1.5 mm), 5/64" (2 mm), 5/32" (4 mm), 7/32" (6 mm), 5/16" (8 mm), 3/8" (10 mm), 15/32" (12 mm) and 5/8" (15 mm)
- Crimping Plate  $\frac{5}{32}$ " (4 mm) and  $\frac{5}{16}$ " (8 mm)
- Shredder Plates 5/64" (2 mm), 1/8" (3 mm), 5/32" (4 mm), 7/32" (6 mm) and 5/16" (8 mm)
- Extra Fine Grater Plate
- □ Julienne Plate <sup>5</sup>⁄<sub>64</sub>" x <sup>5</sup>⁄<sub>64</sub>" (2x2 mm), <sup>5</sup>⁄<sub>32</sub>" x <sup>5</sup>⁄<sub>32</sub>" (4x4 mm)
- Dicing Grid  $-\frac{5}{16}$ " x  $\frac{5}{16}$ " (8x8 mm),  $\frac{3}{8}$ " x  $\frac{3}{8}$ " (10x10 mm),  $\frac{15}{32}$ " x  $\frac{15}{32}$ " (12x12 mm) and  $\frac{5}{8}$ " x  $\frac{5}{8}$ " (15x15 mm)
- Wall Rack



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

# PROCESSING



**C32** CONTINUOUS FEED FOOD PROCESSOR

## **SPECIFICATIONS**

Motor: 11/2 hp, 2-speed, thermal motor protection with automatic reset.

Electrical: Furnished in 120/60/1, 9 amps, UL Listed, 3-wire electrical cord and plug. Cord is 6' in length.

Finish/Construction: Machine base of aluminum. Continuous feed attachment and ejector plate of polycarbonate.

Plates: All cutting knives are stainless steel. Slicing, julienne, crimping, and shredding discs feature a stainless steel base plate with a polycarbonate mounting hub. Soft slicing discs are a machined aluminum plate construction. Grater discs have a molded plastic frame and a stainless steel plate. All cutting discs have a stainless steel drive pin. Dicing grids are a thermoplastic frame construction with stainless steel cutting knives molded in place.


**Controls:** Sealed dial controls with integrated pulse function.

Speeds: 2 speeds (500/800 rpm) for slicing, dicing, shredding and grating.

**Operator Protection:** Dual interlocks keep machine from operating unless attachment is in the proper position.

Capacity: 4.4 lbs./minute.

Warranty: Parts, labor and travel coverage for one year, exclusive of wear items.

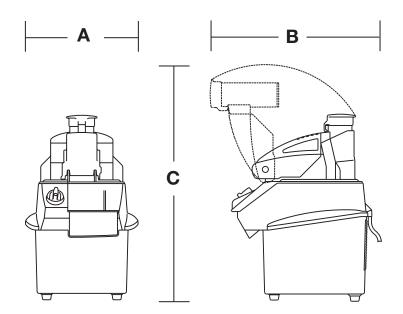

**Continuous Feed** 

MODEL NO.	CAPACITY	PRODUCT DIMENSIONS			WEIGHT
		WIDTH A	DEPTH B	HEIGHT C	WEIGHT
C32	4.4 lbs./min (2 kg/min.)	11" (280 mm)	13¾" (350 mm)	23" (585 mm)	Net 23 lbs. (11 kg) Ship 33 lbs. (15 kg)

MOTOR	ELECTRICAL	CUTTING SPEEDS	BOX DIMENSIONS		
MOTOR			WIDTH A	DEPTH B	HEIGHT C
1½ HP	120/60/1 9 amps	500/800 rpm	16¼" (413 mm)	16¼" (413 mm)	27" (686 mm)

Berkel a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602