VULCAN

VC3E SERIES SINGLE DECK ELECTRIC CONVECTION OVEN





SPECIFICATIONS

Single section, electric convection oven, Vulcan Model No. (VC3ED). Stainless steel front, sides and top. Painted legs. Independently operated removable stainless doors with double pane windows. Non-sag insulation applied to top, rear, sides, bottom. Porcelain enamel on steel oven interior measures $29"w \times 221/_8"d \times 20"h$. One interior oven light. Five nickel plated oven racks measure $281/_4" \times 201/_2"$. Eleven position nickel plated rack guides with positive rack stops. Heated by electric solid sheath elements rated at 12.0 KW. Furnished with a two speed $1/_2$ H.P. oven blower motor. Oven cool switch for rapid cool down. 208/240V 60Hz 1 or 3 phase.

Exterior Dimensions:

40"w x 401/8"d (includes motor & door handles) 37"d (includes motor only) 54"h on 23³/4" legs (add 2" if on casters)

STANDARD FEATURES

- Solid state temperature controls from 150° to 500°F.
- 60 minute timer with audible alarm.
- Stainless steel front, sides and top.
- Painted legs.

OVENS

- Independently operated removable stainless steel doors with double pane windows.
- 12.5 total KW.
- If $\frac{1}{2}$ H.P. two speed oven blower-motor.
- Moisture vent.
- Oven cool switch for rapid cool down.
- Porcelain enamel on steel oven interior.
- Five nickel plated oven racks with eleven rack positions.
- One year limited parts and labor warranty.
- Three year limited warranty on doors.

OPTIONS

- □ Stainless steel legs.
- □ Casters.
- □ 480V/60 Hz/1 or 3 phase.
- □ Second year extended limited parts and labor warranty.

ACCESSORIES

- □ Stainless steel rear motor enclosure.
- Extra oven rack(s).
- □ Rack hanger(s).
- □ Stainless steel drip pan.
- Stainless steel open stand with adjustable rack supports, stainless steel shelf and choice of adjustable feet or casters.
- Down draft flue diverter for direct vent connection.
- Heat shields for oven sides.



a division of ITW Food Equipment Group LLC

OVENS

VULCAN


VC3E SERIES SINGLE DECK ELECTRIC CONVECTION OVEN


OPTIONAL VOLTAGES


□ 480 volt, 60 Hz, 3 phase.

CLEARANCES

	Combustible	Non-Combustible
Rear	2"	2"
Right Side	4"	4"
Left Side	1"	1"

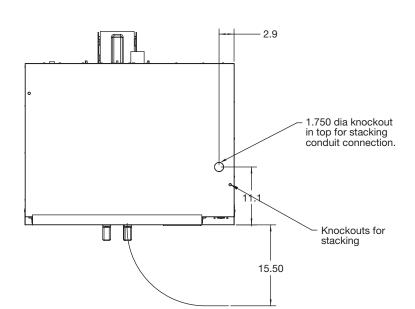





		3 PHASE LOAD KW PER PHASE		NOMINAL AMPS PER LINE WIRE										WEIGHT					
				3 PHASE									WITH SKID & PACKAGING		WITHOUT SKID & PACKAGING				
	TOTAL CONN.			208 VOLT		240 VOLT			480 VOLT			1 PHASE							
NO.		X-Y	Y-Z	X-Z	X	Y	Z	Х	Y	Z	Х	Y	Z	208V	240V	LBS.	KG	LBS.	KG
VC3E	12.5	4	4	4.5	35	33	35	33	29	33	14	15	15	60	52	337	153	286	130



P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

NOTE: In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.