



(NSF)

Safety and Convenience Features

Berkel Model TM-100 food processor is a high performance, versatile machine that quickly cuts, cubes, chops, dices, grates or juliennes vegetables, fruits, cheeses, meats and other products. The combination of high-grade stainless steel blades and a slower knife speed results in quality cuts especially with soft products. A convenient slant design and product feed pusher combine for ease of use and efficient operation with a capacity of up to 485 lbs. per hour. The unit's No-Volt release prevents activation of the processor in the event of a power interruption, requiring the operator to restart the unit. The double, micro-switch interlock also provides added safety. The easy opening head allows for quick change-out of attachments. The TM-100 is easy to clean and disassembles quickly without tools.

Approved By:
Date

Model TM-100

Food Processor

Standard Features

- Versatile machine quickly cuts, cubes, chops, dices, grates or juliennes vegetables, fruits cheeses meats and many other products
- ➤ The combination of high-grade stainless steel blades and a slower knife speed results in quality cuts especially with soft products
- ➤ Standard equipment includes product bowl, ejecting device, pusher and disc holding rack
- ➤ 1-speed, .7 HP, totally enclosed, ventilated and permanently lubricated knife motor, thermally protected
- ➤ Furnished in 115/60/1, 4.5 amp, AC, ETL listed
- ➤ No-Volt release prevents activation of the processor in the event of power interruption; operator must restart the processor
- ➤ Double, micro-switch interlock prevents the processor from operation if the head is not closed or if the pusher is up and away from the chute opening for added operator safety
- ➤ Finish is stainless steel and sanitary anodized aluminum; unit disassembles quickly without tools for easy cleaning
- ➤ Convenient slant design and product feed pusher combine for ease of use and efficient operation
- Capacity of 485 lbs. per hour output
- Removable pusher center for continuous loading of small products
- ➤ Ejector for smooth discharge of product from the processor
- Easy opening head for quick change out of attachments
- ➤ Rear-mounted, thermoplastic pusher extends over the entire width of the product feed chute for efficient operation
- ➤ Disk holding rack for convenient storage of discs
- ➤ Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle

-						
Λ	\sim	$\sim c$	20	cr	ri	c

u	Slicing Disc (1/16", 5/64", 1/8", 5/32", 3/16",
	5/16", 3/8", 9/16")
	Grating Disc (1/32", 5/64, 1/8", 9/32", 11/32")
	Cubing Disc (5/16", 3/8") Slicing disc required
	Julienne Disc (5/32" 7/32" 5/16" 3/8")



1-speed

.7 HP

Model TM-100

28-1/2"

(724 mm)

Food Processor

Model No.	. Output Per hour		Product Dimens Width A				eight C	Height Extended D	
TM-100	485 lbs (218 kg.)		11" (280 mm)		20" (510mm)		8" 160 mm)	31" (785 mm)	
	Motor	Electrical	RPM	Weigh Net	t Ship		Box Dimensi Width	ons Depth	Height

49 lbs.

(22 kg.)

53 lbs.

(24 kg.)

Specifications

Standard Equipment: Product bowl, ejecting device, pusher and disc holding rack are included as standard. (Discs are not included.)

115/60/1

300


Output Capacity: Versatile machine quickly cuts, cubes, chops, dices, grates or juliennes vegetables, fruits, cheeses, meats and many other products. The combination of high-grade stainless steel blades and a slower knife speed results in quality cuts especially with soft products. Unit runs at 300 RPM and can produce up to 485 lbs. of product per hour.

Motor: 1-speed, .7 HP, totally enclosed, ventilated, permanently lubricated ball bearings, thermally protected.

Electrical: Furnished in 115/60/1, 4.5 amp, AC, ETL listed.

Finish/construction: All food contact areas are stainless steel and sanitary anodized aluminum. The easy opening head allows for quick change out of attachments. Processor disassembles quickly without tools for easy cleaning and includes a disk holding rack for convenient storage of discs.

Design: The convenient slant design and product feed pusher combine for ease of use and efficient operation. The rear-mounted, thermoplastic pusher extends over the entire width of the feed chute for efficient loading of product. The pusher center is removable for continuous loading of small products. The processor features an easy opening head for quickly changing attachments and an ejector for smooth operation.

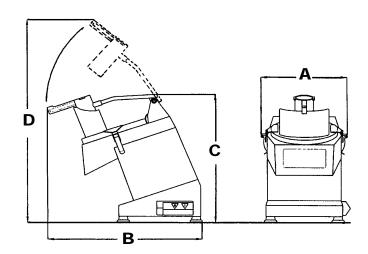

20"

(508 mm)

(356 mm)

No-Volt Release: Prevents activation of the processor in the event of power interruption; operator must restart processor.

On/Off Switch: Double, micro-switch for added operator safety.

Cord and Plug: Attached 6-foot, flexible, 3-wire cord for grounded receptacle.

Warranty: All parts, service and travel coverage for one year, excluding wear items.

As we continually strive to improve our products, specifications are necessarily subject to change without notice.

