




## "THRIFTY" SERIES GAS COUNTER GRIDDLES AND HOT PLATES




Thrifty No.1

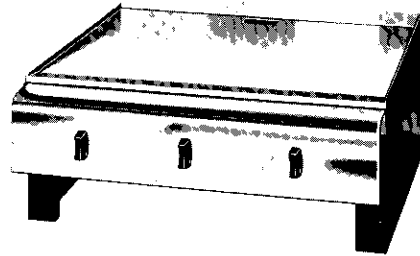


Thrifty No.2

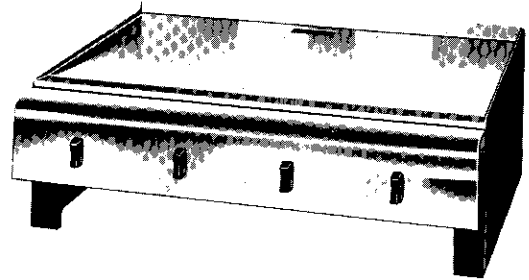


Thrifty No.3

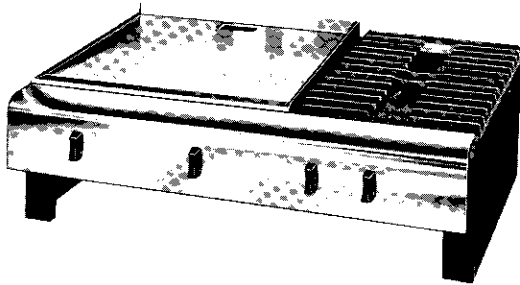


Thrifty No.4

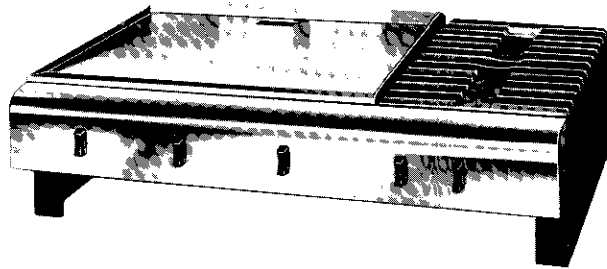

Thrifty No.5

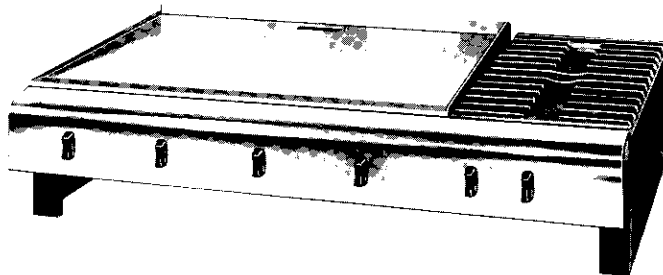

Thrifty No.6

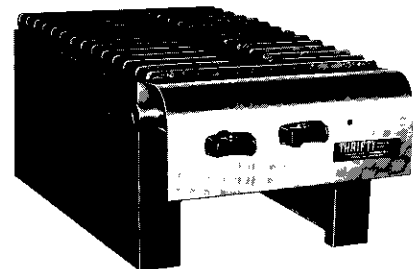

Thrifty No.7

All Thrifty models listed by the National Sanitation Foundation



### STANDARD FEATURES:

- **Griddle**  
Plat polished rolled steel with 1 $\frac{3}{4}$ " steel backsplash and sloped side splashers to reduce excessive splashing of grease. Grease slot at rear empties into large grease collector below.
- **Burners**  
Vulcan cast iron non-clogging, efficient in operation and easy to clean. 12,000 BTU/hr rated input. Adjustable orifice, natural gas or propane gas. Standing pilot lights for griddle burners and open burners.

- **Grates Over Open Burners, Model 4, 5, 6 and 7**  
One piece Vulcan cast iron flat grates designed especially for restaurant use.
- **Body and Frame**  
Made of aluminized steel, well constructed and braced throughout. Beautiful, gleaming brushed chrome manifold cover is easy to keep clean.
- **Gas Valves**  
Made to comply with construction provisions of American National Standard for manually operated gas valves Z21.15-1974 designated by Delta-C. (Commercial cooking equipment valves).
- **Handles**  
Non-breakable black enameled metal.
- **Thrifty Hotplate Features:**  
A two burner free standing hotplate. 12" wide by 22" deep by 9" high. Each burner with a 12,000 BTU/hr input, total 24,000 BTU/hr. Burners, pilot(s), grate, body, gas valve, handle information same as on griddle.

$\frac{3}{4}$ " gas connection. Gas manifold across front of each unit.

# VULCAN

## "THRIFTY" SERIES GAS COUNTER GRIDDLES AND HOT PLATES

	Thrifty #1	Thrifty #2	Thrifty #3
Width	18"-457 mm	24"-610 mm	30"-762 mm
Depth	22"-559 mm	22"-559 mm	22"-559 mm
Height	9"-229 mm	9"-229 mm	9"-229 mm
Griddle Dimensions	18" x 18" 457 x 457 mm	24" x 18" 610 x 457 mm	30" x 18" 762 x 457 mm
Griddle Burners	2	3	4
Open Burners	0	0	0
BTU/hr Input/Burner	12,000	12,000	12,000
Total BTU/hr Input	24,000	36,000	48,000


	Thrifty #4	Thrifty #5	Thrifty #6	Thrifty #7
Width	30"-762 mm	36"-895 mm	42"-1067 mm	12"-305 mm
Depth	22"-559 mm	22"-559 mm	22"-559 mm	22"-559 mm
Height	9"-229 mm	9"-229 mm	9"-229 mm	9"-229 mm
Griddle Dimensions	18" x 18" 457 x 457 mm	24" x 18" 610 x 457 mm	30" x 18" 762 x 457 mm	- -
Griddle Burners	2	3	4	-
Open Burners	2	2	2	2
BTU/hr Input/Burner	12,000	12,000	12,000	12,000
Total BTU/hr Input	48,000	60,000	74,000	24,000

Dimensions			
Stand	Wide	High	Deep
No.40	30" 762 mm	26 <sup>1</sup> / <sub>4</sub> " 667 mm	18" 457 mm
No.50	36" 895 mm	26 <sup>1</sup> / <sub>4</sub> " 667 mm	18" 457 mm
No.60	42" 1067 mm	26 <sup>1</sup> / <sub>4</sub> " 667 mm	18" 457 mm

### IMPORTANT

1. A pressure regulator sized for this unit must be furnished by the installer. Natural Gas 4" W.C. Propane Gas 10" W.C.
2. An adequate ventilation system is required for Commercial Cooking Equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269. When writing refer to NFPA No. 96-1980.

Ends of stand 18 guage steel-Shelf and top 18 guage steel. Shipped knocked down in carton. Easily assembled.

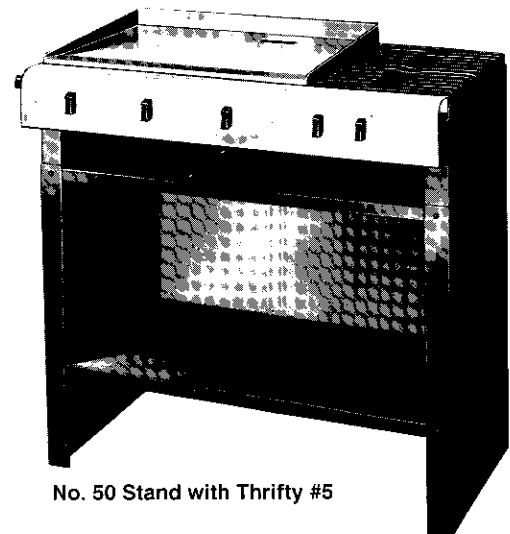

No. 50 Stand with Thrifty #5

**NOTE:** In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.